




RAW WATER STRAINERS (SISO)

Arctic Steel water strainers are designed to be superior in every aspect. There is no welding to corrode in these robust one piece cast strainers. The inherent swirl action created by the offset outlet is designed to quickly scavenge air whilst maximising the used area of the rugged full height basket. The efficient lid design ensures safe, quick and easy access for maintenance. Suitable for marine engines, generators and aircon units.

Side In Side Out Range

- Free standing, base mounted.
- Offset inlet and outlet for improved performance.
- Electro-polished AISI 2205 cast stainless steel body.
- Solid electro-polished stainless steel lid.
- Secured by 5 wing nuts for safe, quick and easy access. No tools required.
- Swing down eye bolts eliminates need to remove nuts.
- BSP or NPT thread available.
- 1.25" and 1.5" come standard with full height, high impact resistant ABS basket.
- 2", 2.5", 3" and 4" come standard with a full height 316 stainless steel basket.
- Cast anode connection point to combat galvanic corrosion.
- Drain plug.
- Lower outlet position allows for applications that require a header tank or mounting above the waterline.

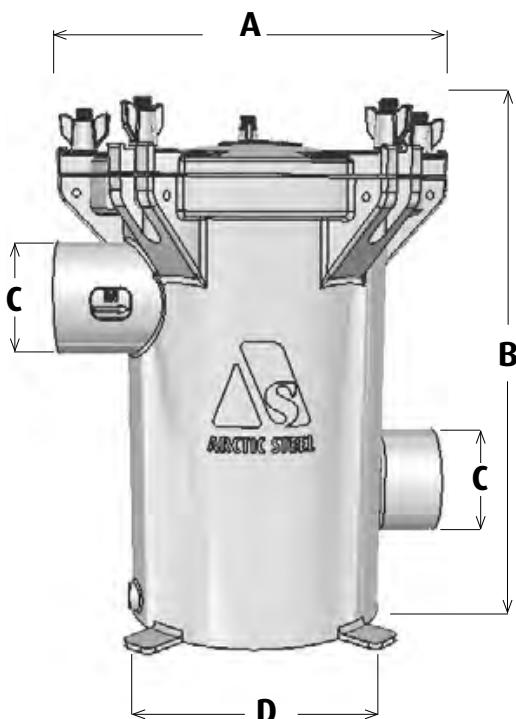

Available Options:

- Interchangeable clear poly carbonate lid.
- 316 Stainless Steel mounting brackets and extension arms.

Size Inlet Thread / Outlet Thread	Weight Kg Solid	Flow Rate 0.1 Bar L/Min	Flow Rate 1 Bar L/Min	Lid Width A mm	Height B mm	Thread Size C mm	Body Width D mm
1.25" F/F	6.8	148	477	200	269	1.25" /32mm	133
1.5" F/F	7	212	682	200	269	1.5" /38mm	133
2" F/F	7.25	336	1066	200	269	2" /50mm	133
2.5" F/F	13.6	561	1826	235	365	2.5" /63mm	164
3" F/F	14.8	864	2813	235	365	3" /75mm	164
4" F/F	20	1708	5490	273	478	4" /100mm	221

Flow rates calculated using clean ABS basket



GENERAL
Marine
SERVICES

156 Beaumont Street · Westhaven · Auckland · New Zealand
Sales Ph +64 9 309 0048 · sales@generalmarine.co.nz
Service Ph +64 9 368 0938 · service@generalmarine.co.nz

www.generalmarine.co.nz